



7FT DINNING POOL TABLE ASSEMBLY INSTRUCTION



www.trsports.com.au
masontaylorliving.com.au



1300 655 308
customerservice@trsports.com.au

IMPORTANT :

This instruction is designed for professional dinning pool tables. Please read through the instruction book before attempting assembly to familiarize yourself with all parts and assembly steps.

We've tried our best to state all steps clearly, but please understand that we couldn't draw all the details completely due to the complexity of some steps. So we highly recommend you find and watch the video instruction on the home page of above websites.

If the installation is still difficult for you after reading instruction book and watching the video, please feel free to contact us, as we also provide affordable and professional installation service for most areas.

Before Assembling Slate Pool Tables

























Thank you for purchasing T&R Sports products. Please read carefully these precautions about the assembly before start assembling your tables.

- 1 Choose a right place to position your slate table. The place you want to put your table should be as flat as possible. Otherwise this will increase the difficulty of leveling which is not easy for an unprofessional installer.
- 2 Once you find a suitable place, please start installing at this exact location, because when you finish the installation, you cannot move the table anymore. Moving slate table will cause the table to be uneven. An uneven table, even one that's only slightly off, will cause the pool balls to roll and adversely affect the accuracy of your shots.
- 3 Before assembling, we recommend installer preparing necessary tools as mentioned below.
 - Level,
 - Sandpaper,
 - Putty (Builder's bog is available in Bunnings),
 - Staple gun or Spray adhesive,
 - Needle Nose Plier,
 - Shims,
 - Screwdriver (Electrical is recommended)
- 4 Two or more persons are needed for assembly. Pay careful attention during transport or assembly as slate pool tables are very heavy.
- 5 Be sure to wear protective gear like work gloves to avoid injury during assembly.
- 6 Be sure to protect the floor, wall or surrounding furniture with carpet, blanket or shock-absorbing materials during assembly in order not to damage them. Assembly work should be done where there is enough space.


Maintaining Slate Pool Tables

- Never lift, move or sit on your table due to easy breakage of slate.
- Keep your table in a dry, cool space and away from any sharp instruments.
- Please use a dry cloth to clean the timber surface.
- Do not eat, drink or smoke over the table. Remember to cover the table after playing.
- If any relocation, re-felting, refurbishment or removal services are required, please contact us to experience the professional services.


PARTS IDENTIFIER

<p>P1 Slates (2 end & 1middle)</p>  <p>3PCS</p>	<p>P2 Long Beam</p>  <p>2PCS</p>	<p>P3 Short Beam</p>  <p>2PCS</p>	<p>P4 Side Cushion</p>  <p>4PCS</p>	
<p>P5 End Cushion</p>  <p>2PCS</p>	<p>P6 Table Leg</p>  <p>4PCS</p>	<p>P7a Corner Pocket</p>  <p>4PCS</p>	<p>P7b Middle Pocket</p>  <p>2PCS</p>	<p>P8 End Apron</p>  <p>2PCS</p>
<p>P9 Side Apron</p>  <p>2PCS</p>	<p>P10 Dinning Top</p>  <p>1315x2240mm 2PCS</p>	<p>P11 Dining Top Support Batten</p>  <p>960X55mm 3PCS</p>	<p>#1 Bolt For Cushion</p>  <p>M10×150mm 2PCS</p>	<p>#2 Rectangular Washer</p>  <p>35×25×3.5mm 4PCS</p>
<p>#3 Bolt For Cushion</p>  <p>M10×100mm 4PCS</p>	<p>#4 Rectangular Washer</p>  <p>40×25×10mm 8PCS</p>	<p>#5 Bolt For Cushion</p>  <p>M8×45mm 18PCS</p>	<p>#6 Washer</p>  <p>30×9×1.5mm 18PCS</p>	<p>#7 Self-tapping Screw</p>  <p>M4×20mm 12PCS</p>
<p>#8 Bolt</p>  <p>M8×40mm 28PCS</p>	<p>#9 Washer</p>  <p>30×9×2mm 28PCS</p>	<p>#10 Bolt</p>  <p>M6×35mm 8PCS</p>	<p>#11 Washer</p>  <p>22×7×1.5mm 8PCS</p>	<p>#12 Self-tapping Screw</p>  <p>M5×50mm 12PCS</p>


1. Open the leg box, take out four legs on level ground. Four legs are the same, no direction.

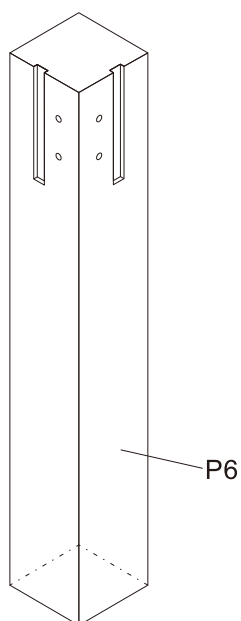


2. Take out 2 pcs of short support beams and long support beams respectively, fix the wooden plug into the holes of legs.

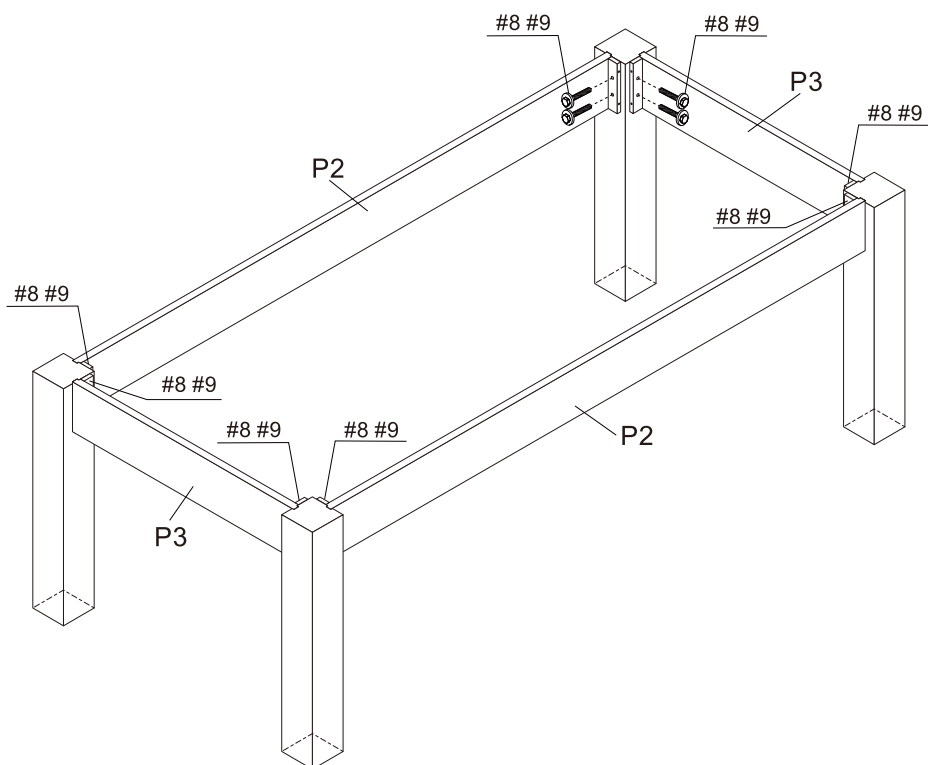


3. Please check the levelness by a leveller and adjust the leg levellers before you putting the slates on. If you don't know how to do it, we highly recommend you watching the video instruction.

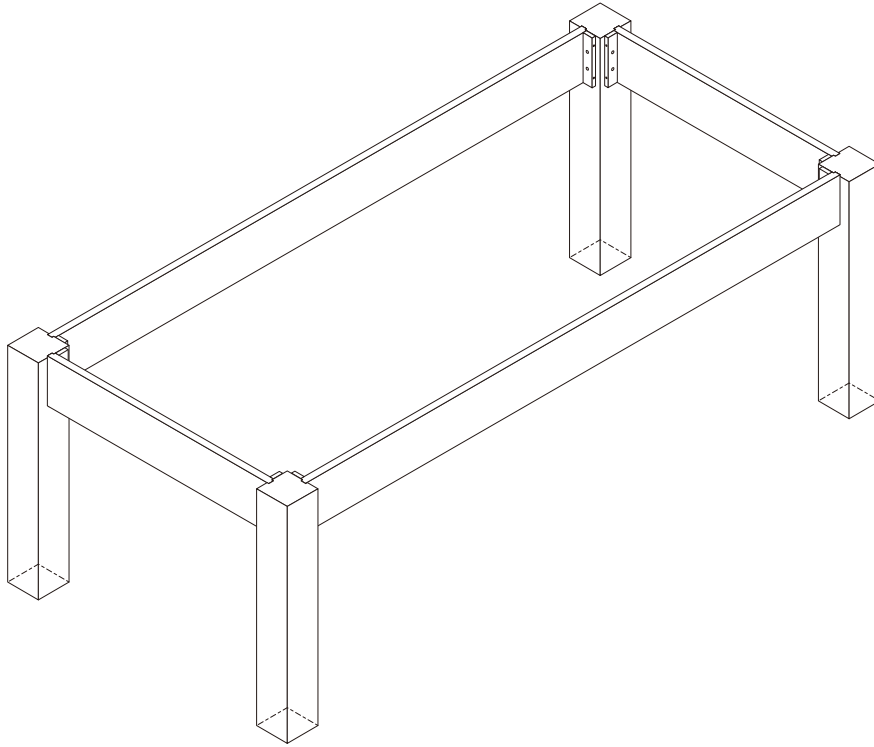


4. Put the slate on the beams, measure the 4 sides to ensure it sits in the center. Then check and adjust the levelness of slates by putting shims underneath the slate.
5. Put putty into the gaps of slates and then sand it to be smooth. For details, please check our video instruction.

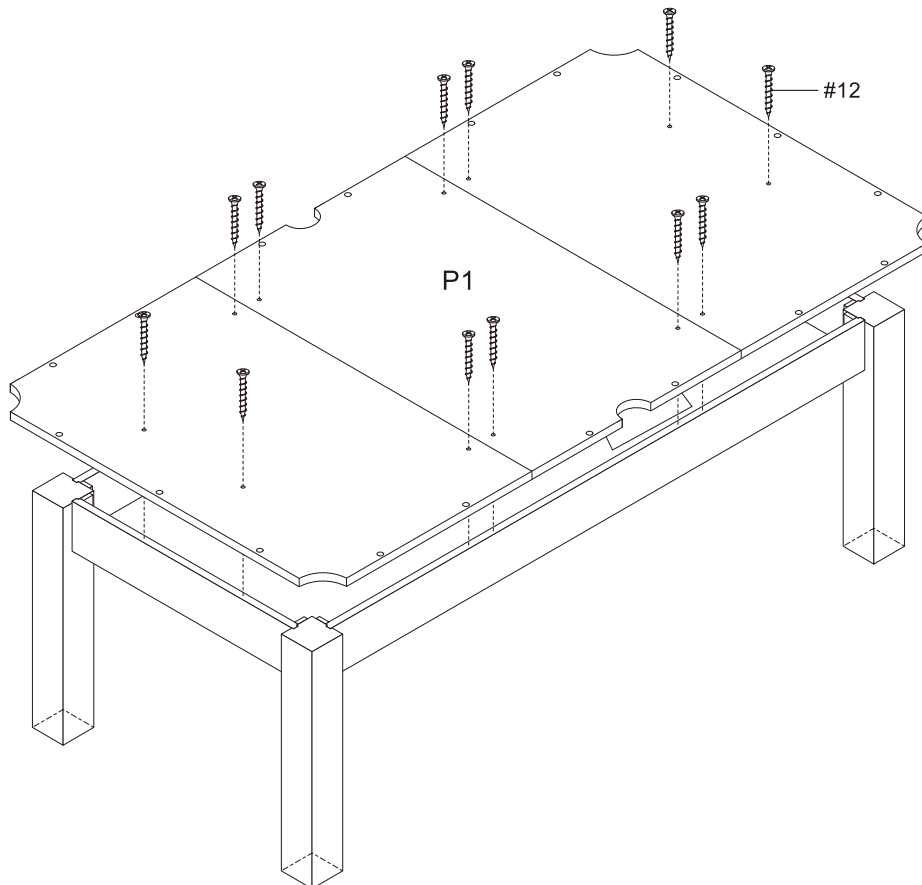


6. Before attaching bed cloth, please clean slate thoroughly. Lay the bed cloth over the top of the slate, nap side up. Leave an equal amount of cloth overhang at the end and sides of the slate.
7. Adjust cloth to leave only enough cloth overhang at the head end and left side to permit tacking into the wood slate frame. Leave the balance of cloth overhang at the foot end and right side.

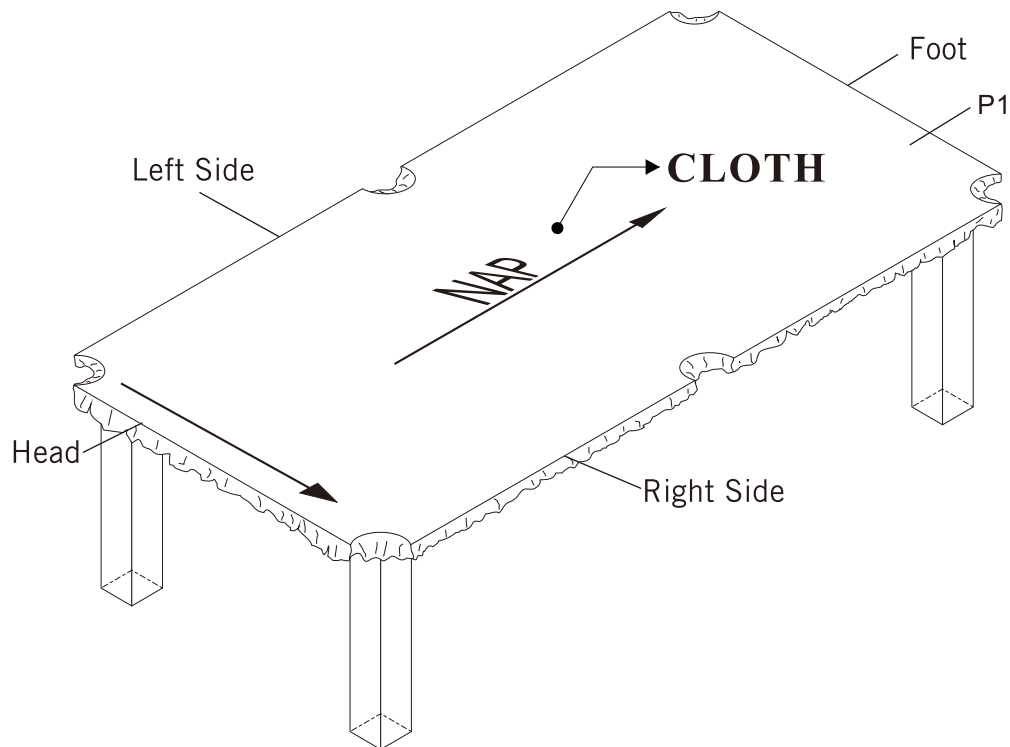


8. Glue or staple the cloth securely to the wood frame at location #1 approximately 2" apart.
9. Stretch the cloth across the table and glue or staple securely at location #2 approximately 2" apart.
10. Stretch the cloth from location #1 to location #3 and glue or staple securely into the wood frame at the left side of the table.
11. Stretching the cloth across the table from location #3 and pulling from location #2, glue or staple the cloth at location #4.

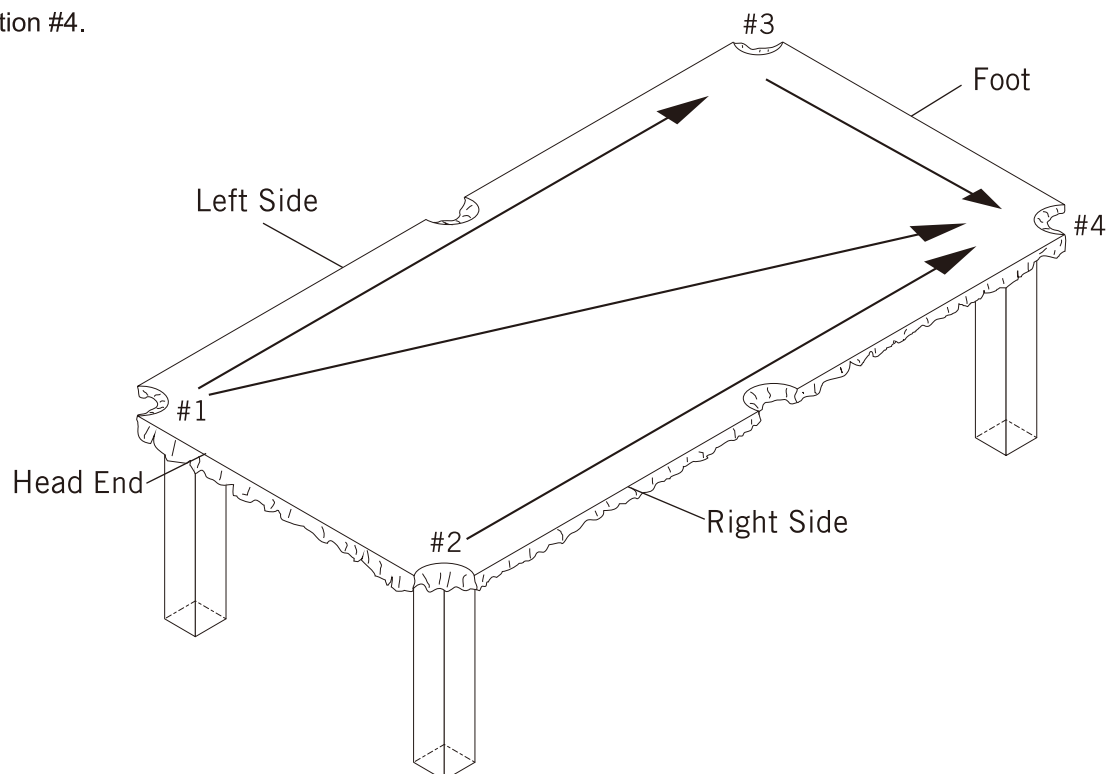


12. On the left side, stretch the cloth tightly from location #1 toward the side pocket opening and glue or staple securely at location #5.
13. Repeat step 10, stretching the cloth from location #3 and gluing or stapling at location #6.
14. On the right side of the table, grasp the cloth firmly and stretch across the table from location #5 and toward the side pocket from location #2 and glue or staple at location #7.
15. Repeat step 14, stretching the cloth from location #6 and toward the side pocket from location #4 and glue or staple at location #8.

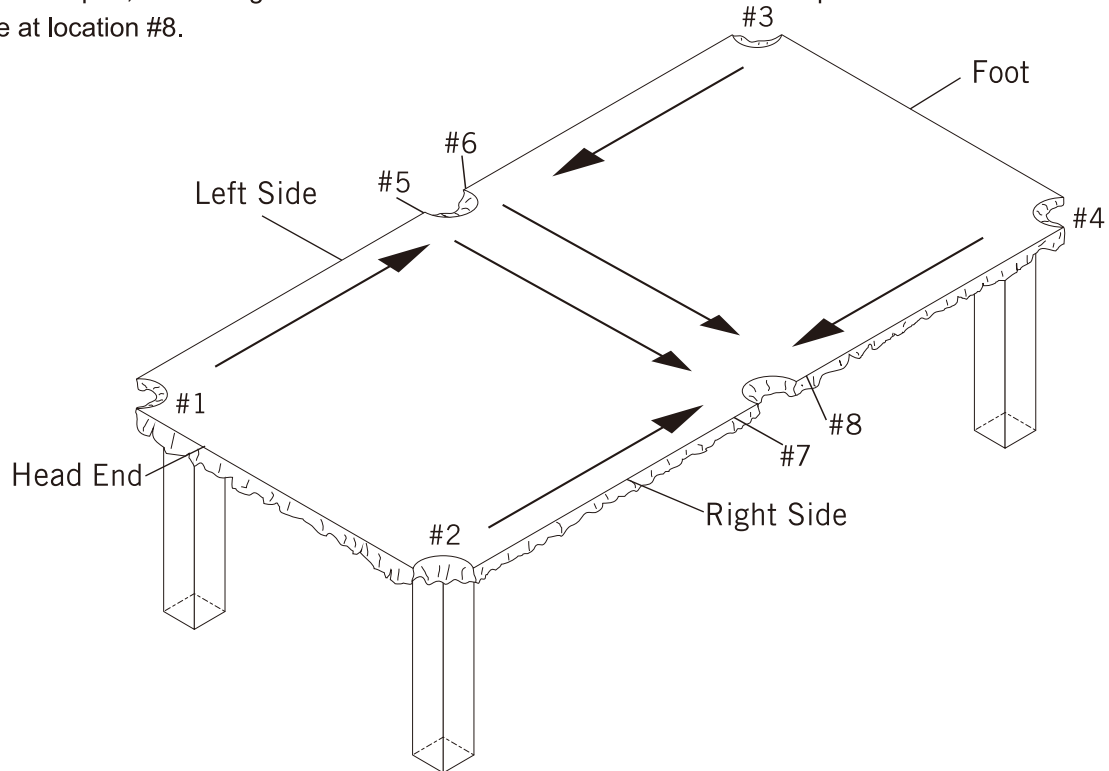


16. At location #9, cut a short slit in the cloth at the edge centered on the side pocket opening. Grasp the cloth firmly above this slit, pull the cloth into the side pocket opening and glue or staple to the wood frame. Complete fastening of the cloth to the side pocket opening, making sure the cloth is glued or stapled to the wood frame.
17. Stretching the cloth tightly across the table from location #9, repeat step 16 at location #10.

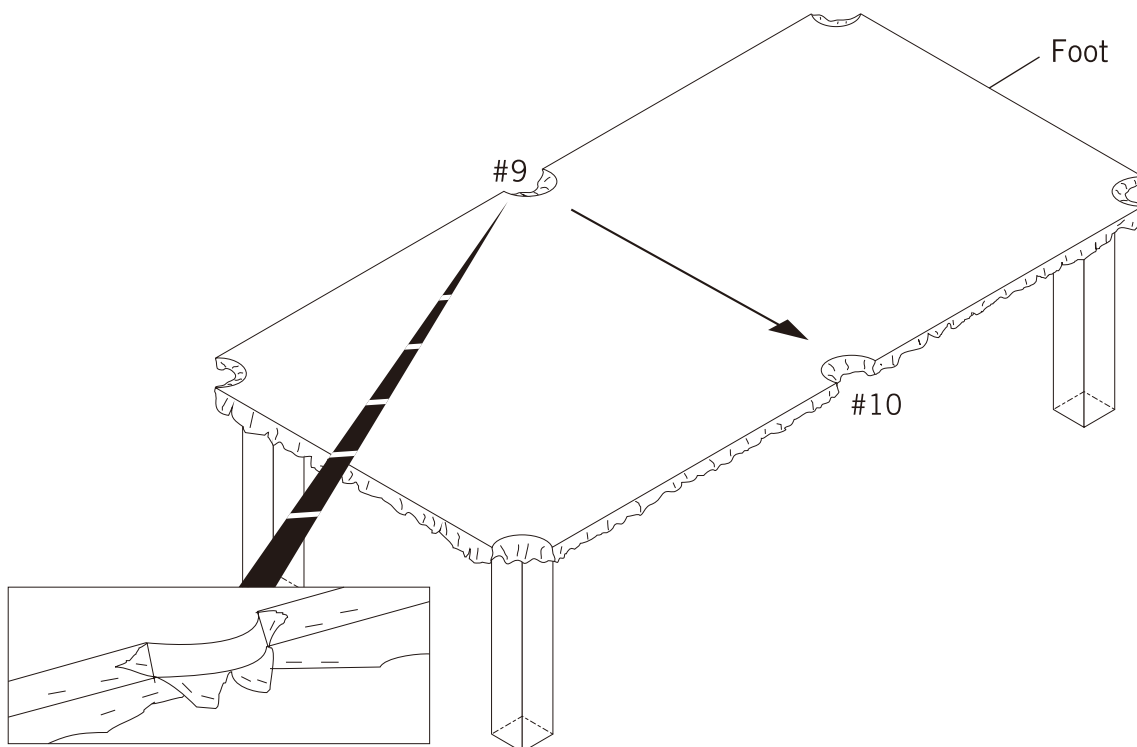

18. At the head end of the table, glue or staple the cloth at location #11, maintaining uniform overhang.
19. Pull the cloth from location #11 toward location #12 and glue or staple securely along the wood frame, keeping the cloth even along the head end.
20. Stretch the cloth firmly from location #11 to the foot end of the table and glue or staple at location #13.
21. Stretch the cloth tightly from location #12 and #13 toward location #14 and glue or staple securely along the wood slate frame.

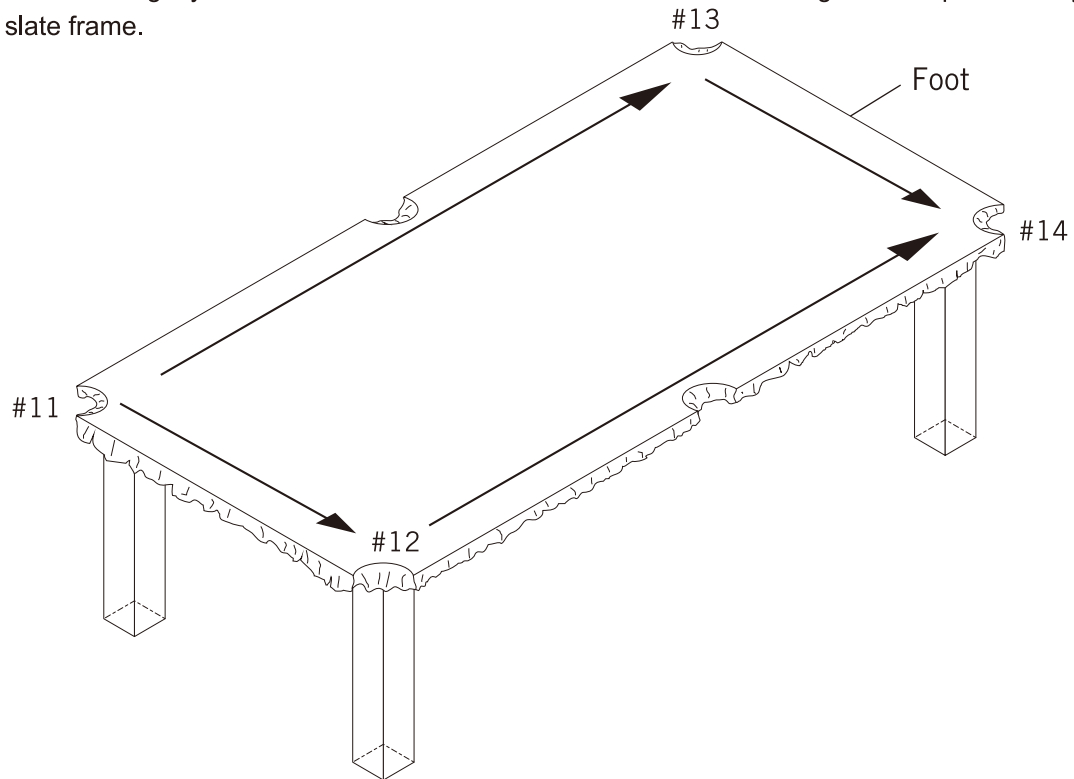

22. Glue or staple all of the left side on 2" centers keeping the cloth even along the wood frame.
23. Glue or staple the balance of the head end on 2" centers also keeping the cloth even along the wood frame.
24. Stretch the cloth tightly toward the foot end of the table, gluing or stapling on 2" centers along the wood frame at the foot end.
25. Stretch the cloth tightly across the table to the right side, gluing or stapling on 2" centers all the way along the wood frame at the right side.

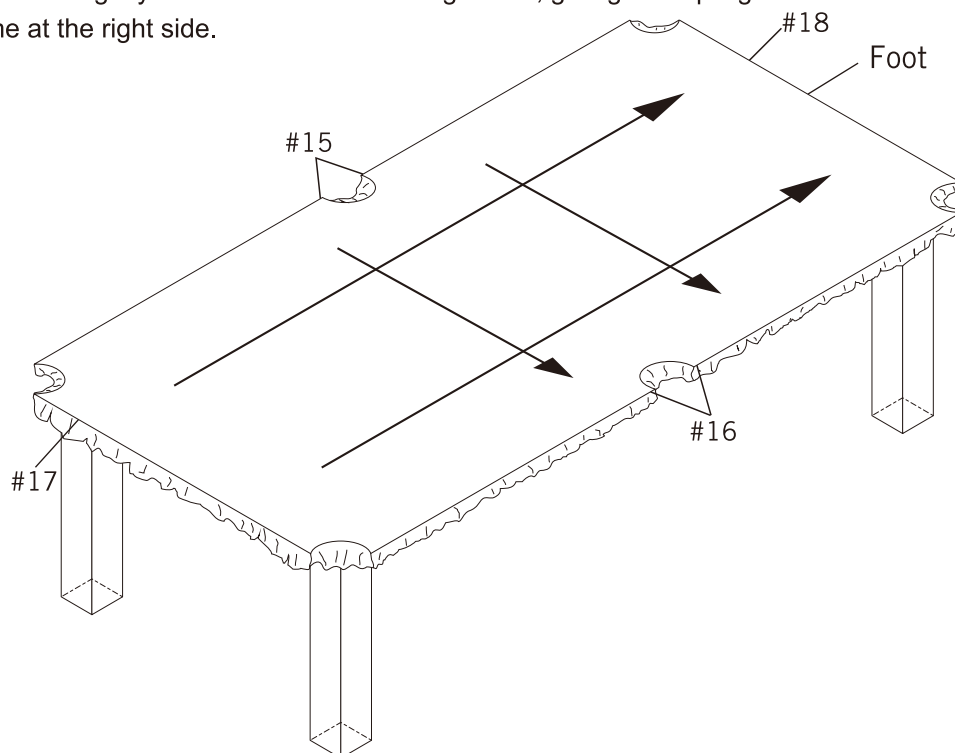


26. Stretch the cloth into the corner pocket openings and glue or staple to the wood slate frame.


27. Trim off excess cloth around the perimeter of the slate. Locate the eighteen(18) rail attach holes and cut clearance holes in the cloth with a sharp knife.

Note: Occasionally cloth will stretch, leaving wrinkles at the pockets. To retighten, remove apron, one end rail and one side rail. Pull cloth taut, and reglue or restaple along the open end and side to restore original tightness.


Cut holes in cloth at
rail both locations.

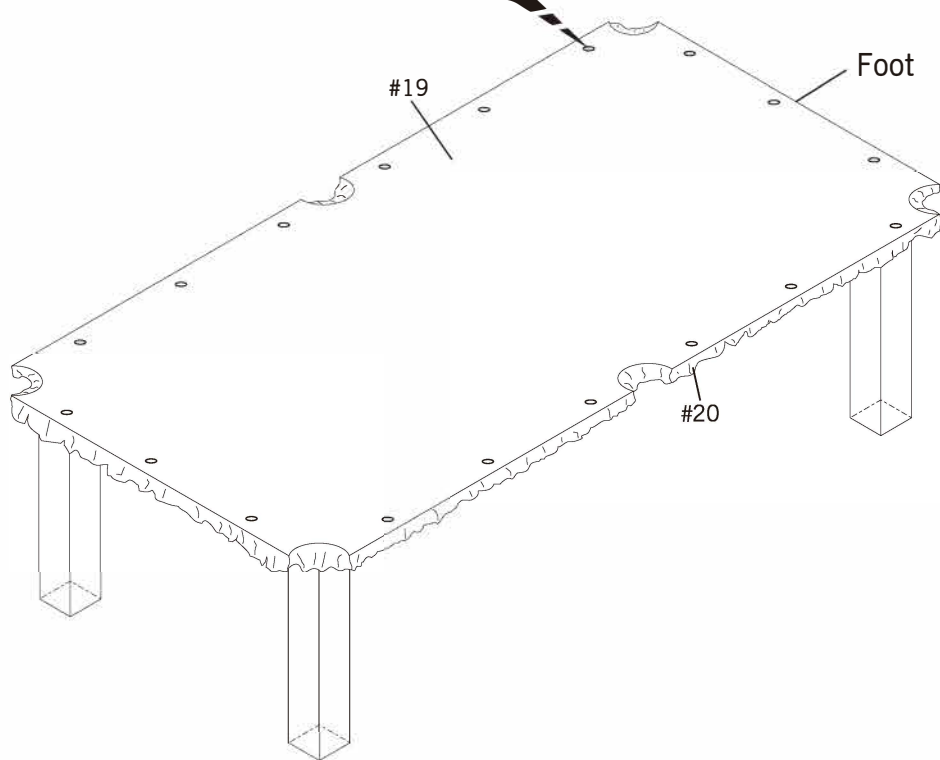


28. Take out 6 cushions and put the cushions upside down, then followed by labeled A,B,C on the cushion to Connect together

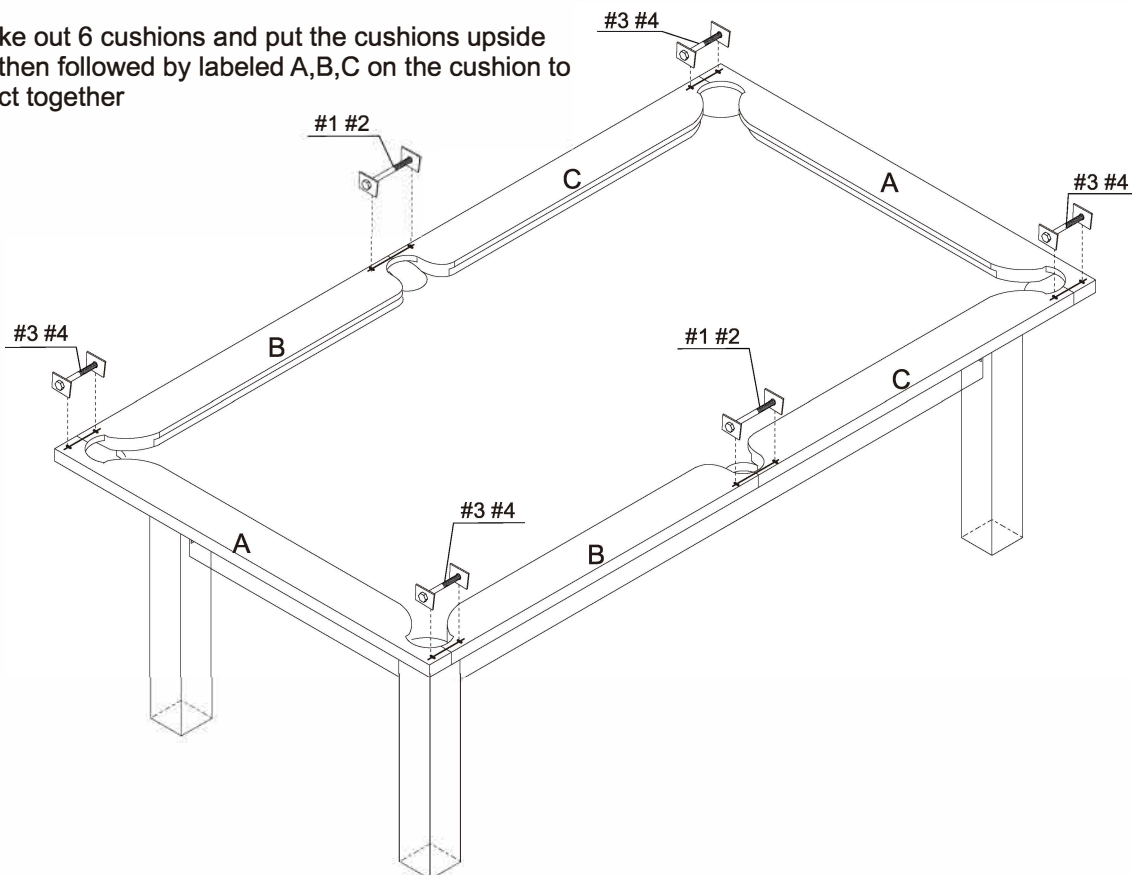


29. Take out two pcs long side panel and two pcs short side panel, Using bolt #8 and washer #9 to fix cushion A,B,C , using bolt #10 and washer #11 to fix long side panel and short side panel in four corner ,As shown in picture:

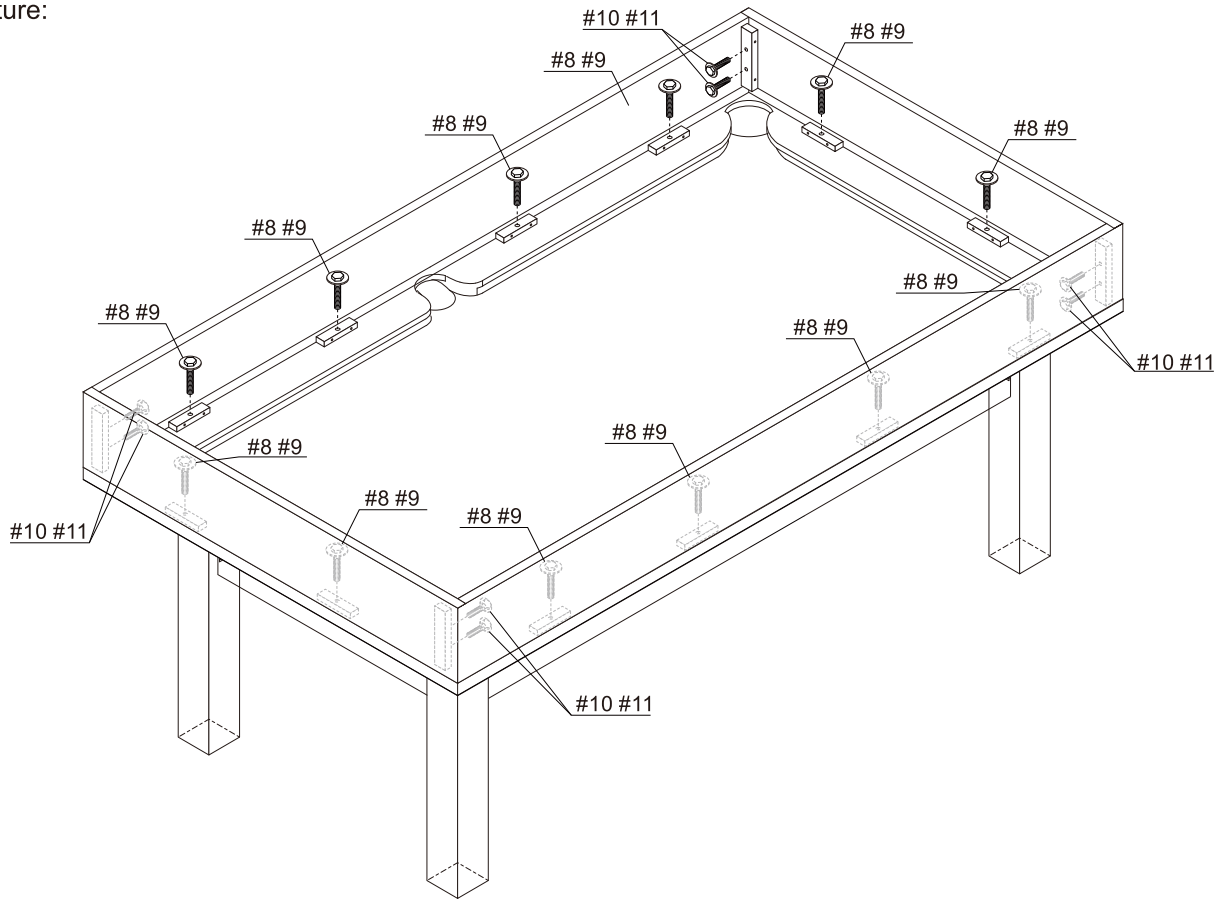

30. Upside down the pool table top part like picture showing, make four sides in horizontal line, Using bolt #5 and washer #6 to tight the cushion with slate, and using screw #7 to fix the pocket on the cushion.

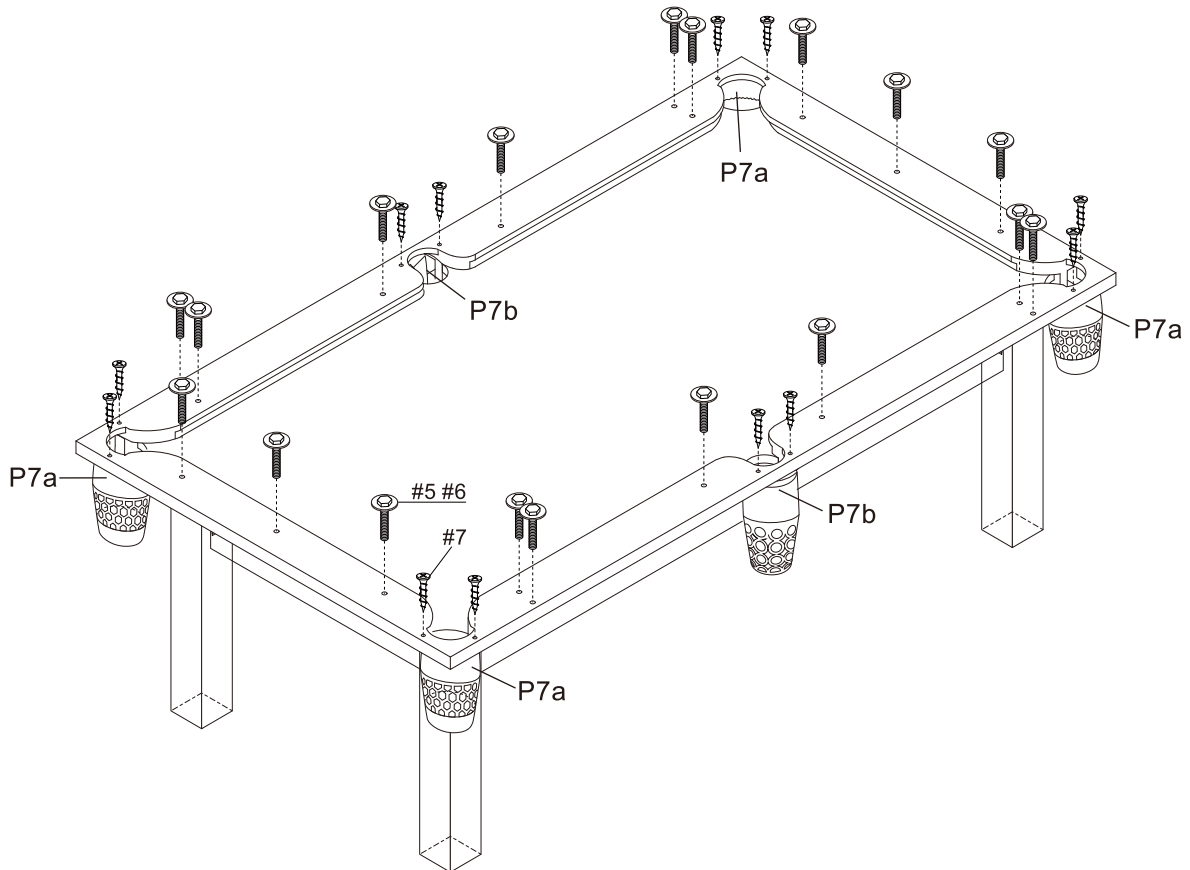

31. put three support batten on table, then put 2 pcs dinning top board on these batten, board's working surface will adjust in the horizontal plane.

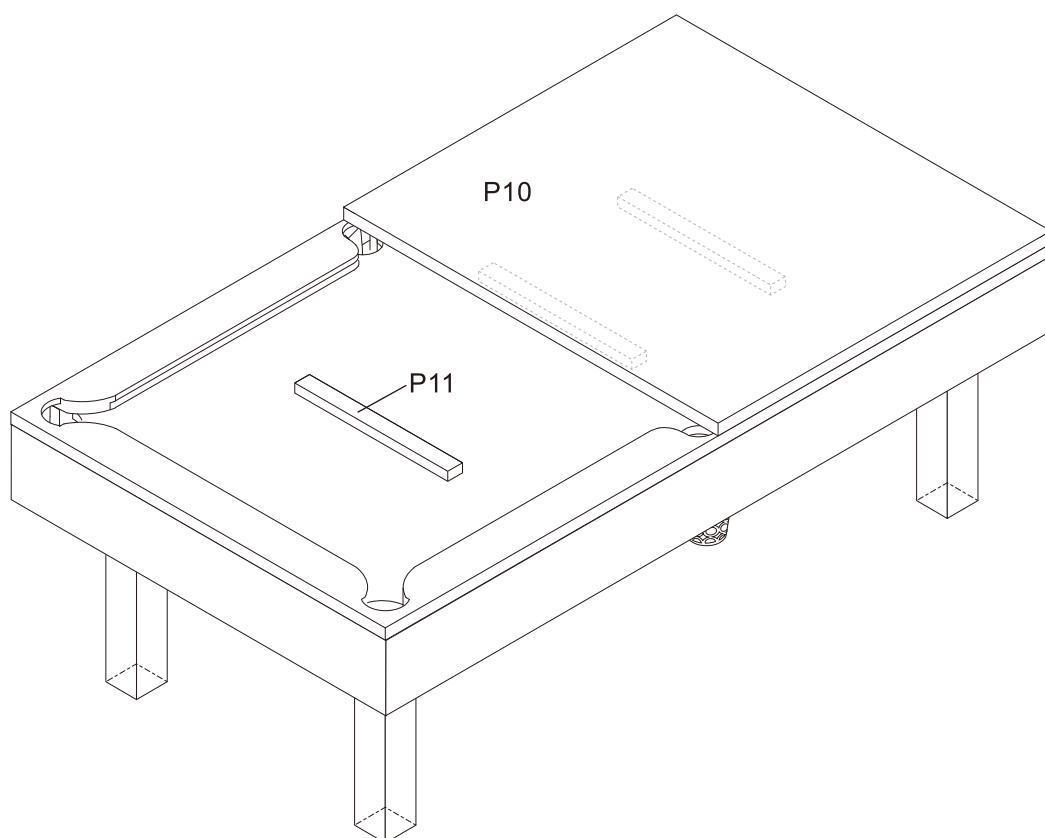

32. Good job, finished.

